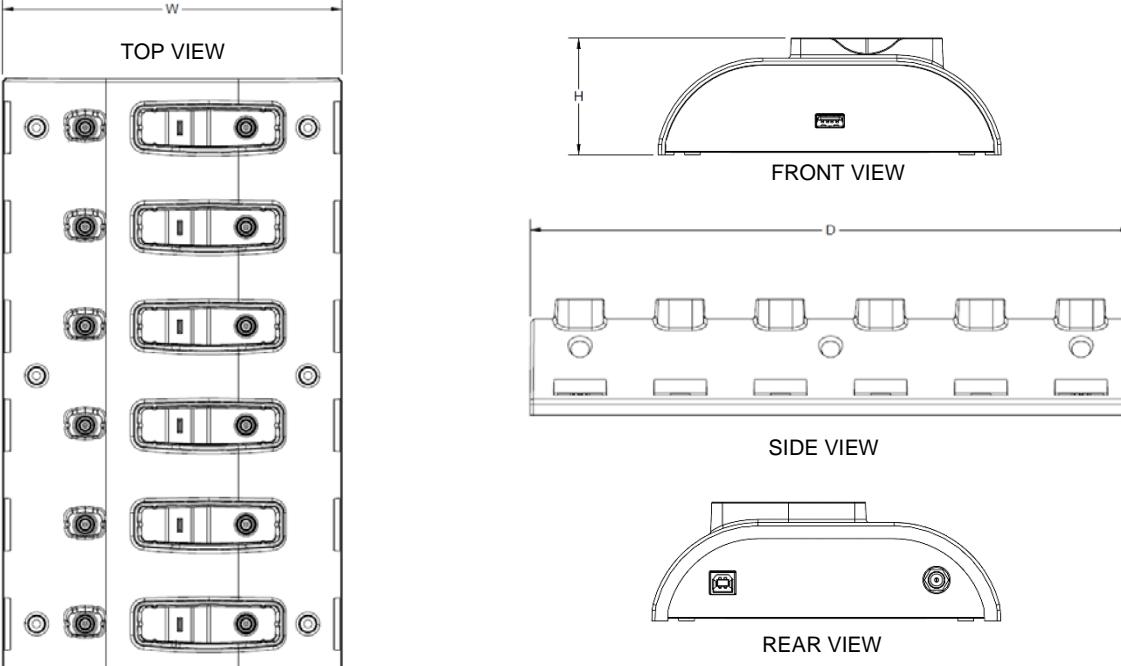


Title: TASER EVIDENCE.com Dock 6-Bay Specifications

Department: Research and Development

Version: 4.0

Release Date: 9/17/2014

AXON® EVIDENCE.com Dock Models		
Model	Model No.	Color
EVIDENCE.com Dock 6-Bay and Core ¹	70026	Black
Specifications ²		
1. Input power requirements ³ Voltage: 15 V DC Current: 4 A DC Power: 60 W Connector: Barrel power connector, inner diameter 0.08" [2.1 mm], outer diameter 0.22" [5.5 mm], length 0.37" [9.5 mm], inside positive 2. Output specifications per port Voltage: 4.5 V DC to 5.5 V DC Current: 500 mA (maximum) Power: 2.75 W (maximum) 3. Operating Temperature: -4 °F [-20 °C] to 167 °F [75 °C] 4. Humidity: 85 percent non-condensing 5. One USB B input port, twelve 2.5 mm dock output ports, one USB A 2.0 output port	Features	
Characteristics		
1. Attaches to EVIDENCE.com Dock core to connect to the Internet.		
Physical Characteristics ^{2,4}		
Width (W)	Height (H)	Depth (D)
6.4" [16.2 cm]	2.18" [5.5 cm]	11.25" [28.6 cm]
		

¹ This document only describes the bay. For information about the core, see the *TASER EVIDENCE.com Doc Core Specifications*.

² Product specification may change without notice; actual product may vary from picture.

³ Required AC service specifications for provided external AC-DC power supply are 100–240 V AC, 1.5 A (min), 50–60 Hz.

⁴ Dimensions and weights are for reference only.

Title: TASER EVIDENCE.com Dock Core Specifications

Department: Research and Development

Version: 4.0

Release Date: 9/17/2014

EVIDENCE.com Dock Core Models		
Model	Model No.	Color
EVIDENCE.com Dock Core Module	70027	Black
Specifications ¹		Features
1. Input power requirements ² Voltage: 15 V DC Current: 4 A DC Connector: Barrel power connector, inner diameter 0.08" [2.1 mm], outer diameter 0.22" [5.5 mm], length 0.37" [9.5 mm], inside positive 2. Output specifications per USB Port Voltage: 4.5 V DC to 5.5 V DC Current: 500 mA (maximum) Power: 2.75 W (maximum) 3. Operating Temperature: -4 °F [-20 °C] to 167 °F [75 °C] 4. Humidity: 85 percent non-condensing 5. Two CAT5E ³ Ethernet ports (one 100BASE-TX local area network (LAN ⁴), one 1000BASE-T wide area network (WAN)) 6. Two USB A 2.0 ports		1. Can be combined with the EVIDENCE.com Dock individual bay or 6-bay to manage AXON® systems. 2. Provides secure connection to EVIDENCE.com ⁵ from the device during transfer. 3. Device status can be observed through web-based status screens. 4. Provides power to device connected to the core to enable battery charging. 5. Diagnostic LEDs indicate power, LAN, WAN, and USB activity. 6. Dynamic and static IP capable network connection. 7. TASER web-based configuration interface. 8. Automatic firmware updates for TASER devices.
Characteristics		
1. Internet connection requirement: Ethernet 10BASE-T (LAN or WAN), 100BASE-TX (LAN or WAN), or 1000BASE-T (WAN)		
Physical Characteristics ^{1,6}		
Width (W)	Height (H)	Depth (D)
6.4" [16.2 cm]	1.8" [4.6 cm]	3.31" [8.4 cm]
		FRONT VIEW
		REAR VIEW

¹ Product specification may change without notice; actual product may vary from picture.

² Required AC service specifications for provided external AC-DC power supply are 100–240 V AC, 1.5 A (min), 50–60 Hz.

³ CAT5E cables must be used with the core.

⁴ LAN is used for configuring the core. The LAN cannot be used to route network traffic.

⁵ Subscription required.

⁶ Dimensions and weights are for reference only.